

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

| | | |
|--|---|--|
| Applicant's or agent's file reference SH-5153-PCT | <div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> FOR FURTHER ACTION </div> <div style="width: 70%;"> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below. </div> </div> | |
| International application No. PCT/KR 94/00177 | International filing date (day/month/year) 16 December 1994 (16.12.94) | (Earliest) Priority Date (day/month/year) 16 December 1993 (16.12.93) |
| Applicant SAMSUNG ELECTRONICS CO., LTD. et al. | | |

This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 3 sheets.

☐ It is also accompanied by a copy of each prior art document cited in this report.

1. ☐ Certain claims were found unsearchable (See Box I).

2. ☐ Unity of invention is lacking (See Box II).

3. ☐ The international application contains disclosure of a nucleotide and/or amino acid sequence listing and the international search was carried out on the basis of the sequence listing

☐ filed with the international application.
☐ furnished by the applicant separately from the international application,

☐ but not accompanied by a statement to the effect that it did not include matter going beyond the disclosure in the international application as filed.

☐ transcribed by this Authority.

4. With regard to the title, ☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.
☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is:

Figure No. 5

☒ as suggested by the applicant.
☐ because the applicant failed to suggest a figure.
☐ because this figure better characterizes the invention.

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR 94/00177

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁶: H 04 N 5/92; G 11 B 20/14; H 03 M 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁶: G 11 B 20/00; H 03 M 7/00; H 04 N 1/00, 5/00, 9/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| X | EP 05 36 630 A2 (KABUSHIKI KAISHO TOSHIBA) 14 April 1993 (14.04.93), fig.1; page 1, line 14 - page 2, line 8; fig.58; page 34, line 29 - page 36, line 11; fig.15; page 10, lines 37-46. | 1-8 |
| A | EP 05 22 853 A2 (SONY CORPORATION) 13 January 1993 (13.01.93), fig.1; column 1, line 12 - column 3, line 36. | 1,5 |
| A | REGIS Saint Girons et al.; "The Digital Sumulcast AD-HDTV Coding System", IEEE Trans.consum.electron., Vol.38, No.4, November 1992, pp 778-783; fig.3,7; chapter 2.2 - 2.4, 3 and 3.1. | 1,5 |
| A | US 52 33 348 A (POLLMAN et al.) 03 August 1993 (03.08.93); fig.4-6; column 2, lines 43-65; column 10, line 62 - column 11, line 24; column 12, lines 14-38; claim 19. | 1,5 |
| A | EP 05 05 985 A2 (KABUSHIKI KAISHA TOSHIBA) 30 September 1992 (30.09.92), fig. 26,28-33; page 3, line 51 - page 4, line 55. | 1,5 |

☐

Further documents are listed in the continuation of Box C.

☒

See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 February 1995 (28.02.95)

Date of mailing of the international search report

13 March 1995 (13.03.95)

Name and mailing address of the ISA/ AT
AUSTRIAN PATENT OFFICE
Kohlmarkt 8-10
A-1014 Vienna
Facsimile No. 1/53424/535

Authorized officer

Dimitrow e.h.

Telephone No. 1/53424/340

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR 94/00177


| Im Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche | Datum der Veröffentlichung Publication date Date de publication | Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets | Datum der Veröffentlichung Publication date Date de publication |
|--|--|--|--|
| EP 536630 | | EP A2 536630 | 14-04-93 |
| | | EP A3 536630 | 22-12-93 |
| | | JP A2 5091469 | 09-04-93 |
| | | JP A2 5137111 | 01-06-93 |
| | | JP A2 5137110 | 01-06-93 |
| | | JP A2 5176298 | 13-07-93 |
| | | JP A2 5268563 | 15-10-93 |
| | | JP A2 5268567 | 15-10-93 |
| | | JP A2 5268568 | 15-10-93 |
| | | JP A2 5308610 | 19-11-93 |
| | | JP A2 6038171 | 10-02-94 |
| EP 522853 | | EP A2 522853 | 13-01-93 |
| | | EP A3 522853 | 19-05-93 |
| | | JP A2 5161115 | 25-06-93 |
| | | NL A 9300059 | 18-10-93 |
| US A 5233348 | 03-08-93 | AU A1 34033/93 | 30-09-93 |
| | | AU B2 654929 | 24-11-94 |
| | | CA AA 2091815 | 27-09-93 |
| | | EP A2 562419 | 29-09-93 |
| | | EP A3 562419 | 22-06-94 |
| | | JP A2 6104768 | 15-04-94 |
| EP 505985 | | EP A2 505985 | 30-09-92 |
| | | EP A3 505985 | 06-10-93 |
| | | JP A2 4298802 | 22-10-92 |



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | | |
|--|--|---|---|
| (51) International Patent Classification ⁶ : H04N 5/92, G11B 20/14, H03M 7/38 | | A1 | (11) International Publication Number: WO 95/17073 |
| | | | (43) International Publication Date: 22 June 1995 (22.06.95) |
| (21) International Application Number: PCT/KR94/00177 | | (81) Designated States: CN, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). | |
| (22) International Filing Date: 16 December 1994 (16.12.94) | | Published With international search report. | |
| (30) Priority Data: 1993-28074 16 December 1993 (16.12.93) KR 1994-34497 15 December 1994 (15.12.94) KR | | | |
| (71) Applicant (for all designated States except US): SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-city, Kyungki-do 441-742 (KR). | | | |
| (72) Inventors; and | | | |
| (75) Inventors/Applicants (for US only): JO, Jae, Moon [KR/KR]; 835-704, Hyundai Apartment, Jangmi Maeul, Yatap-dong, Bundang-gu, Seongnam-city, Kyungki-do 463-070 (KR). JEONG, Je, Chang [KR/KR]; 108-1007, Wooseong Apartment, Yangjae-Dong, Seocho-gu, Seoul 137-130 (KR). | | | |
| (74) Agent: LEE, Young, Pil; 2nd and 3rd floors, Cheonghwa Building, 1571-18, Seocho-dong, Seocho-gu, Seoul 137-073 (KR). | | | |

(54) Title: ADAPTIVE VARIABLE-LENGTH CODING AND DECODING METHODS FOR IMAGE DATA

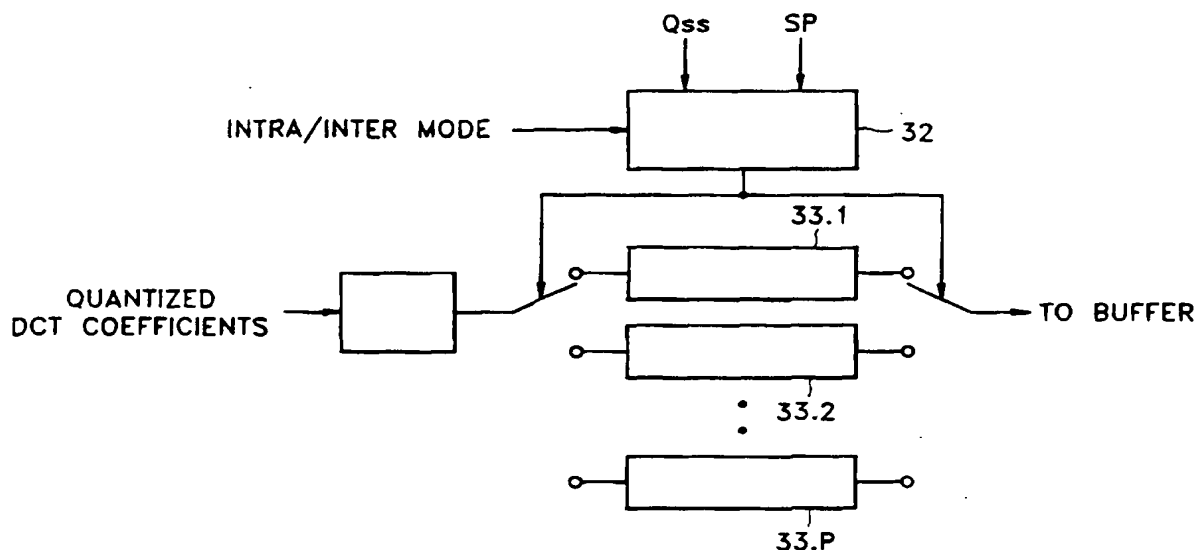

(57) Abstract

An adaptive variable-length coding/decoding method performs an optimal variable-length coding and decoding depending on an intra mode/inter mode condition, quantization step size and a current zigzag scanning position, such that a plurality of variable-length coding tables having different patterns of a regular region and an escape region according to statistical characteristics of the [run, level] data are set. One of the variable-length coding tables is selected according to mode, quantization step size and scanning position, and the orthogonal transform coefficients according to the selected variable-length coding table are variable-length-coded.

ADAPTIVE VARIABLE-LENGTH CODING AND DECODING METHODS
FOR IMAGE DATA

Technical Field

5 The present invention relates to adaptive variable-length coding and decoding methods for digital image data, and more particularly, to adaptive variable-length coding and decoding methods which improve compression efficiency of transmission data by performing variable-length coding
10 and decoding adaptively, according to statistical characteristics of image data.

Background Art

15 Recently, in an apparatus for transmitting and receiving video and audio signals, a method by which the video and audio signals are coded to be digital signals to then be transmitted or stored in a memory and the digital signals are decoded to then be reproduced, has been widely adopted.

20 However, in the case of coding a video signal into digital data, the data quantity is large. Thus, in order to decrease the overall data quantity by removing redundant data contained in the digital video signal, discrete cosine transform (DCT) coding, differential pulse
25 code modulation (DPCM), vector quantization, or variable-length coding (VLC) should be performed.

 FIG. 1 is a schematic block diagram of a general coding system for image data. The apparatus includes means
30 11 and 12 for performing a DCT function with respect to an $N \times N$ block and for quantizing DCT coefficients, means 13 and 14 for variable-length-coding the quantized data and for further compressing data quantity, and means 15, 16, 17, 18, 19, A1, A2, SW1 and SW2 related to the inverse quantization and DCT operations with respect to the
35 quantized data to then perform a motion compensation, which codes image data in an intra mode or inter mode.

 FIG. 2 is a schematic block diagram of a general decoding system for image data. The apparatus decodes and

reproduces the image data coded by the coding system shown in FIG. 1.

The operation of the coding and decoding systems respectively shown in FIGs. 1 and 2 will be briefly described.

In FIG. 1, the video signal input through an input port 10 becomes a signal of a frequency domain in the units of $N \times N$ blocks in DCT 11, where although the magnitude of a block is generally $N_1 \times N_2$, it is assumed that $N_1 = N_2 = N$, for the sake of convenience. The energy of transform coefficients is chiefly concentrated in a low frequency domain. Data transforms for each block are performed by a discrete cosine transform, Walsh-Hadamard transform, discrete Fourier transform, or discrete sine transform method. Here, the transform coefficients are obtained by DCT operation.

Quantizer 12 changes the DCT coefficients into representative values of a constant level through a predetermined quantization process.

Variable-length encoder 13 variable-length-codes the representative values using their statistical characteristics, thereby further compressing the data.

Meanwhile, a quantization step size Q_{ss} , which is varied depending on the state (a fullness) of a buffer 14 wherein the variable-length-coded data is stored, controls quantizer 12 to thereby adjust a transmission bit rate. The quantization step size Q_{ss} is also transmitted to a receiver side, to be used in a decoding system.

Also, in general, there are many similar portions between consecutive screens. Therefore, in the case of a screen having motion, a motion vector MV is obtained by estimating the motion, and data is compensated using the motion vector MV. Then, a differential signal between adjacently positioned screens becomes very small, thereby allowing transmission data to be more compressed.

In order to perform such motion compensation, an inverse quantizer (Q^{-1}) 15 shown in FIG. 1 inverse-quantizes the quantized data output from quantizer 12.

Thereafter, the inverse-quantized data is inverse-DCT-operated in an inverse DCT means (DCT^{-1}) 16 to then be a video signal of a spatial domain. The video signal output from inverse DCT means 16 is stored in a frame memory 17 in frame units. Motion estimator 18 searches a block having the most similar pattern to that of an $N \times N$ block of input port 10 among the frame data stored in frame memory 17 and estimates the motion between blocks to obtain a motion vector MV. The motion vector MV is transmitted to a receiver side to be used in a decoding system and is simultaneously transmitted to a motion compensator 19.

Motion compensator 19 receives the motion vector MV from motion estimator 18 and reads out an $N \times N$ block corresponding to the motion vector MV from the previous frame data output from frame memory 17 to then supply the read $N \times N$ block to a subtractor A1 connected with input port 10. Then, subtractor A1 obtains the difference between the $N \times N$ block supplied to input port 10 and the $N \times N$ block having the similar pattern thereto supplied from motion compensator 19. The output data of subtractor A1 is coded and then transmitted to the receiver side, as described above. That is to say, initially, the video signal of one screen (intraframe) is coded wholly to then be transmitted. For the video signal of the following screen (interframe), only the differential signal due to the motion is coded to then be transmitted.

Meanwhile, the data whose motion is compensated in motion compensator 19 is summed with the video signal output from inverse DCT means 16 in an adder A2 and is thereafter stored in frame memory 17.

Refresh switches SW1 and SW2 are turned off at a certain interval (here, the period is one group of pictures or a GOP period) by a control means (not shown), so that an input video signal is coded into a PCM mode to then be transmitted in the case of an intraframe mode and so that only the differential signal is coded to then be transmitted in the case of an interframe mode, thereby refreshing cumulative coding errors for a constant period

(one GOP). Also, a refresh switch SW3 allows the transmission errors on a channel to deviate from the receiver side within the constant time period (one GOP).

In this manner, the coded image data V_c is
5 transmitted to the receiver side to then be input to the decoding system shown in FIG. 2. The coded image data V_c is decoded through the reverse process to the coding process in a variable-length decoder 21. The data output from variable-length decoder 21 is inverse-quantized in an
10 inverse quantizer 22. At this time, inverse quantizer 22 adjusts the magnitude of the output DCT coefficients depending on the quantization step size Q_{ss} supplied from the encoding system.

An inverse DCT means 23 inverse-DCT-operates the DCT
15 coefficients of a frequency domain, supplied from inverse quantizer 22, into the image data of a spatial domain.

Also, the motion vector MV transmitted from coding system shown in FIG. 1 is supplied to a motion compensator 24 of decoding system. Motion compensator 24 reads out the
20 $N \times N$ block corresponding to the motion vector MV from the previous frame data stored in a frame memory 25, compensates the motion and then supplies the compensated $N \times N$ block to an adder A3. Then, adder A3 adds the inverse-DCT-operated DPCM data to the $N \times N$ block data supplied from
25 motion compensator 24 to then output to a display.

FIGs. 3A, 3B and 3C schematically show the process of coding image data. The sampling data of an $N \times N$ block shown in FIG. 3A is DCT-operated to be DCT coefficients of a frequency domain by the DCT method, etc., as shown in FIG.
30 3B. The DCT coefficients are quantized and are scanned in a zigzag pattern, to then be coded in the form of run-length and level-length, as shown in FIG. 3C.

While the scanning is performed from a low frequency component to a high frequency component in scanning the
35 $N \times N$ block, as shown in FIG. 3C, a "run" and "level" and set as a pair expressed as [run, level], and is then coded.

Here, the run represents the number of 0's present

between coefficients not being "0" among the quantized coefficients of an N×N block, and the level corresponds to the absolute value of the coefficient not being "0".

For example, in the case of an 8×8 block, the run is distributed from "0" to "63" and the level varies depending to the data value output from a quantizer. That is to say, if the quantized output value is indicated as an integer ranging from "-255" to "+255," the level has a value ranging from "1" to "+255." At this time, the positive or negative sign is expressed by an extra sign bit. In this manner, when a [run, level] pair is set as a symbol, if the run or level is large, the probability of the symbol is statistically very low.

Therefore, as shown in FIG. 4, the block is divided into a regular region and an escape region according to the probability of the symbol. For the regular region where the probability of the symbol is relatively high, a Huffman code is used in coding. For the escape region where the probability of the symbol is low, data of a predetermined fixed length is used in coding. Here, according to the Huffman code, the higher the probability of the symbol, the shorter the code is set, and vice versa.

Also, the escape sequence ESQ in which data of escape region is coded is composed of an escape code ESC, run, level and sign data S, each having a predetermined number of bits, as expressed in the following equation (1).

$$ESQ = ESC + RUN + L + S \quad \dots (1)$$

For example, as described above, if the quantized value is from "-255" to "+255" in an 8×8 block, the escape sequence has a constant data length of 21 bits in total since the escape code data ESC is six bits, run data RUN is six bits, level data L is eight bits, and sign data S is one bit.

In this manner, according to the conventional variable-length coding method, since various extra information is also transmitted together with coded data and the escape sequence set by one variable-length coding

table depending on the statistical characteristics of data has a constant fixed length, there is a limit in compressing data quantity by coding transmitted data.

5 Disclosure of the Invention

Therefore, it is an object of the present invention to provide an adaptive variable-length coding method which improves compression efficiency of data by selecting an optimal variable-length coding table among a plurality of
10 variable-length coding tables according to the current scanning position and quantization step size while scanning in a zigzag pattern by block type, i.e., inter/intra mode.

It is another object of the present invention to
15 provide a method for decoding data coded by the above adaptive variable-length coding method.

To accomplish the above object, there is provided an adaptive variable-length coding method according to the present invention whereby quantized orthogonal transform
20 coefficients are scanned in a zigzag pattern, are DCT-operated to be [run, level] data and then are variable-length-coded in a coding system for image data, the method comprising the steps of:

setting a plurality of variable-length coding tables
25 having different patterns of a regular region and an escape region according to statistical characteristics of the [run, level] data;

selecting one of the plurality of variable-length coding tables according to intra/inter mode information of
30 the currently processed block, zigzag scanning position and quantization step size; and

variable-length-coding the orthogonal transform coefficients according to the selected variable-length coding table.

35 In a decoding system for image data, the adaptive variable-length decoding method according to the present invention for decoding data coded by the adaptive variable-length coding method, comprises the steps of:

- setting a plurality of variable-length decoding tables having different patterns of a regular region and an escape region according to statistical characteristics of the [run, level] data;
- 5 inputting intra/inter mode information transmitted from the coding system;
- inputting quantization step size transmitted from the coding system;
- detecting position information while zigzag-scanning
- 10 by accumulating run values of [run, level] data;
- selecting one of the plurality of variable-length decoding tables according to the intra/inter mode information, quantization step size and position information; and
- 15 variable-length-decoding the data received according to the selected variable-length decoding table.

Brief Description of the Drawings

FIG. 1 is a block diagram of a general coding system

20 for image data;

FIG. 2 is a block diagram of a general decoding system for image data;

FIGs. 3A and 3B are schematic diagrams for explaining steps of the data processing process according to the

25 apparatus shown in FIG. 1;

FIG. 4 shows a conventional variable-length coding and decoding table;

FIG. 5 is a schematic block diagram of a variable-length encoder for implementing an adaptive variable-length coding method according to the present invention;

30 length coding method according to the present invention;

FIGs. 6A and 6B illustrate a method for selecting a variable-length coding table partitioned by a predetermined number in the adaptive variable-length coding method according to the present invention, wherein

35 FIG. 6A represents the intra mode and FIG. 6B represents the inter mode; and

FIGs. 7A, 7B and 7C are histograms [run, level] for each symbol at the first, second and Pth regions shown in

FIGs. 6A and 6B.

Best mode for carrying out the Invention

Hereinbelow, a preferred embodiment of the present
5 invention will be described with reference to the accompanying drawings.

In the adaptive variable-length coding method according to the present invention, a plurality of variable-length coding tables are used. The table is
10 selected in accordance with a block type, quantization step size and a current scanning position while scanning a block in a zigzag pattern. This selection is in accordance with the statistical characteristics of [run, level] data which vary depending on block type, i.e.,
15 intra mode/inter mode or luminance signal/color signal, quantization step size and a current zigzag scanning position, and which will be described in more detail.

The inter mode for coding the differential signal between the current block data and motion compensated
20 block data generates most of the DCT coefficients as "0" but scarcely generates larger values, compared to the intra mode for coding input block image data sequentially. This is because the variation in a motion compensation estate error thereof is typically smaller than that of the
25 original video signal.

Also, the statistical characteristics of color which depend on the decimation in the spatial domain and narrow bandwidth are different from those of luminance.

Therefore, in accordance with intra/inter mode and
30 luminance/color information, there may be four block types, i.e., (intra, luminance), (intra, color), (inter, luminance) and (inter, color). However, for the block type in the present invention, the luminance/color information is excluded and only the intra/inter mode is considered,
35 because the color statistics are dependent on the down-sampling structure of the color signal.

Also, in the case of a large quantization step size, DCT coefficients are not high in the high frequency

components and many are generated as "0's" while the quantizer scans in a zigzag pattern. That is to say, in order to utilize the human visual characteristics, the DCT coefficients are divided into primary weighting matrices.

5 Since the weighting matrix for high frequency component is large, when the current scanning is a high frequency component, small values (including "0") are often produced but large values are scarcely generated.

Therefore, the present invention proposes an adaptive
10 variable-length coding/decoding method using a plurality of variable-length coding/decoding tables in which the block type (intra/inter mode), scanning position and quantization step size are combined, which is called a Huffman code book.

15 Also, the present invention is adopted for a general coding system shown in FIG. 1 and for a general decoding system shown in FIG. 2.

FIG. 5 is a schematic block diagram of a variable-length encoder for implementing the adaptive variable-length coding method according to the present invention.
20

According to FIG. 5, quantized DCT coefficients are scanned in a zigzag pattern by zigzag scanner 31.

Variable-length coding table selector 32 outputs a control signal for selecting the corresponding first to
25 Pth variable-length coding tables 33.1, 33.2, ..., 33.P according to the block type (intra/inter mode), quantization step size Qss, and scanning position SP.

The quantized DCT coefficients output from zigzag scanner 31 are variable-length-coded in accordance with
30 the selected variable-length coding table, to then be transmitted to buffer 14 shown in FIG. 1.

Variable-length decoder 21 of the decoding system shown in FIG. 2 variable-length-decodes data coded in the reverse order to that of the variable-length coding
35 process as shown in FIG. 5.

Subsequently, the method for selecting a plurality of variable-length coding/decoding tables will be described in detail with reference to FIGs. 6A, 6B and 7A to 7C.

FIG. 6A shows P variable-length coding tables T_1, T_2, \dots, T_p selected in accordance with quantization step size Q_{ss} and the current scanning position SP (during zigzag scanning) for the intra mode. FIG. 6B shows P variable-length coding tables T_1, T_2, \dots, T_p selected in accordance with quantization step size Q_{ss} and the current scanning position SP (during zigzag scanning) for the inter mode.

The "0" scanning position SP corresponds to the DC component, the "63" scanning position SP represents the last scanning position in the corresponding block, and quantization step size Q_{ss} has values ranging from "0" to "62."

First, in order to select one of P variable-length coding tables T_1, T_2, \dots, T_p , it is determined whether the currently process block mode is an inter mode or intra mode.

That is to say, as shown in FIGs. 6A and 6B, the blocks for selecting the variable-length coding tables T_1, T_2, \dots, T_p are different depending on the mode. In other words, compared to the inter mode, the intra mode has larger selection blocks for the first and second variable-length coding tables T_1 and T_2 and a smaller selection block for the Pth variable-length coding table T_p .

In the determined mode, the first, second or Pth variable-length coding table T_1, T_2 or T_p are selected in accordance with quantization step size Q_{ss} and scanning position SP.

Quantized DCT coefficients are variable-length-coded in accordance with the selected variable-length coding table.

Here, an example of P regions partitioned on a (SP, Q_{ss}) plane in accordance with intra and inter modes shown in FIGs. 6A and 6B can be expressed as follows.

In the intra mode:

region 1: $SP + Q_{ss} < K_1$;
 region 2: $K_1 \leq SP + Q_{ss} < K_2$; and
 region P: $K_{p-1} \leq SP + Q_{ss} < K_p$

In the inter mode:

region 1: $SP + Q_{ss} < L_1$;
region 2: $L_1 \leq SP + Q_{ss} < L_2$; and
region P: $L_{p-1} \leq SP + Q_{ss} < L_p$

The proper partition as above can be sought
5 empirically based on sufficient statistical analysis for
various experimental states. These states include such
factors as video sequence, bit rate, GOP and partitioning
method.

FIGs. 7A, 7B and 7C show examples of the variable-
10 length coding tables shown in FIGs. 6A and 6B.

The variable-length coding tables have a regular
region and escape region which differ depending on the
statistical characteristics of [run, level].

That is to say, the first, second, ..., Pth tables
15 T_1, T_2, \dots, T_p have the regular region and escape region
having different patterns and the Pth table T_p has a
smaller regular region than that of the first or second
tables T_1 or T_2 .

Meanwhile, the [run, level] symbol is likely to have
20 a low probability thereof if the run and/or level lengths
have a large value. As shown in FIG. 4, the respective
symbols of the escape region has a fixed length of 21 bits
obtained by adding a six-bit escape code, an eight-bit
run, one-bit sign data.

25 However, in escape coding, since there is redundancy
in the run and level fields, the data quantity may be
reduced. That is to say, the bit number required for
expressing run is dependent on the scanning position
during zigzag scanning for two dimensional DCT
30 coefficients and the bit number required for expressing
level is dependent on the quantization step size. Also,
quantization weighting matrices of intra-coded blocks and
inter-coded blocks are different from each other.

The new escape sequence ESQ having a fixed length of
35 21 bits can be modified into that having a variable length
using the aforementioned characteristics according to
Equation (1) above, where ESQ is composed of six bits, RUN
is composed of zero to six bits, L is composed of one to

eight bits, S is composed of one bit, the run data is dependent upon scanning position, and the level is dependent upon quantizer.

Therefore, since the modified escape sequence has a
5 variable length ranging from eight to 21 bits, compared to the fixed length of 21 bits, image data can be further compressed.

In decoding the new escape sequence, since the
10 respective current scanning positions are automatically matched for the coding system and decoding system, the number of bits required for expressing the run value can be matched without transmitting extra information. Also, in the case of the level length, since the quantization step size is transmitted to the decoding system for
15 inverse quantization, the transmitted quantization step size can be used in synchronizing the number of bits required for expressing level, which requires no extra information to be transmitted.

The above-described variable-length coding and
20 decoding methods which improve compression efficiency by adjusting the length of the escape sequence variably are disclosed in the U.S. Patent Application 08/069,914 filed on June 1, 1993 by the assignee of the present invention.

According to the present invention, a plurality of
25 variable-length tables are provided for both the coding and decoding sides, which may be slightly more complex in hardware, compared to the case of using a conventional single table. However, the present invention is adopted for the case when a high data compression rate is
30 necessary. Also, the corresponding mode, quantization step size and scanning position information generated in coding side is transmitted to the decoding side. The mode and quantization step size information is transmitted in a constant period of time or is transmitted whenever there
35 is a change. The scanning position information is not transmitted separately but is obtained automatically by accumulating the run values after obtaining [run, level] values of the decoding side.

Therefore, although the information on the selected variable-length coding table is not transmitted separately with respect to the block data transmitted to the decoding side, the variable-length coding table selected during
5 coding can be identified from the mode and quantization step size information transmitted from the coding side and the position information automatically calculated from the run value in the decoding side. Then, the same variable-length coding table as that adopted for coding is used for
10 decoding the transmitted block data.

As described above, the method according to the present invention can increase data compression efficiency such that image data coded and decoded by selecting one of a plurality of variable-length coding tables having a
15 regular region and an escape region, using mode, quantization step size and zigzag scanning position information.

Also, according to the present invention, no extra bit which expresses the variable-length coding table
20 selected during coding is necessary to be transmitted for decoding. The transmission data can be further compressed by adjusting variably the run and level lengths of the data to be coded in the escape region of the selected variable-length coding table.

25

Industrial Applicability

An adaptive variable-length coding/decoding method according to the present invention can improve the compression efficiency of digitally transmitted data and
30 is applicable to various technological fields including digital communication, multimedia and personal computer systems, and digital video apparatuses such as a high definition television or digital videocassette recorder.

What is claimed is:

1. An adaptive variable-length coding method whereby quantized orthogonal transform coefficients are scanned in a zigzag pattern, are modified into [run, level] data and
5 then are variable-length coded in a coding system for image data, said method comprising the steps of:

setting a plurality of variable-length coding tables having different patterns of a regular region and an escape region according to statistical characteristics of
10 said [run, level] data;

selecting one of said plurality of variable-length coding tables according to intra/inter mode information of the currently processed block, zigzag scanning position and quantization step size; and

15 variable-length-coding the orthogonal transform coefficients according to said selected variable-length coding table.

2. The adaptive variable-length coding method as claimed in claim 1, wherein said selecting step has the
20 selection range of a plurality of variable-length coding tables having different patterns of a regular region and an escape region according to said intra/inter mode information of the currently processed block.

3. The adaptive variable-length coding method as
25 claimed in claim 2, wherein said variable-length coding table is selected in accordance with said zigzag scanning position and quantization step size within the range determined by the corresponding mode.

4. The adaptive variable-length coding method as
30 claimed in claim 1, wherein data of said escape region of said variable-length coding table selected in said variable-length-coding step is coded into data having variable run-length and level-length.

5. An adaptive variable-length decoding method for
35 decoding the data coded said the adaptive variable-length coding method as claimed in claim 1, in a decoding system for image data, said method comprises the steps of:

setting a plurality of variable-length decoding

tables having different patterns of a regular region and an escape region according to statistical characteristics of the [run, level] data;

inputting intra/inter mode information transmitted
5 from said coding system;

inputting quantization step size transmitted from said coding system;

detecting position information while zigzag-scanning by accumulating run values of [run, level] data;

10 selecting one of said plurality of variable-length coding tables according to said intra/inter mode information, quantization step size and position information; and

variable-length decoding the data received according
15 to said selected variable-length coding table.


6. The adaptive variable-length decoding method as claimed in claim 5, wherein said variable-length decoding table selecting step has the selection range of a plurality of variable-length coding tables having
20 different patterns of a regular region and an escape region according to said intra/inter mode information of the currently processed block in said mode information inputting step.

7. The adaptive variable-length decoding method as
25 claimed in claim 6, wherein said variable-length decoding table is selected in accordance with said zigzag scanning position and quantization step size within the range determined by the corresponding mode.

8. The adaptive variable-length decoding method as
30 claimed in claim 5, wherein data of said escape region of said variable-length decoding table selected in said variable-length-decoding step is decoded into [run, level] data corresponding to variable run-length and level-length.

1/7

FIG. 1

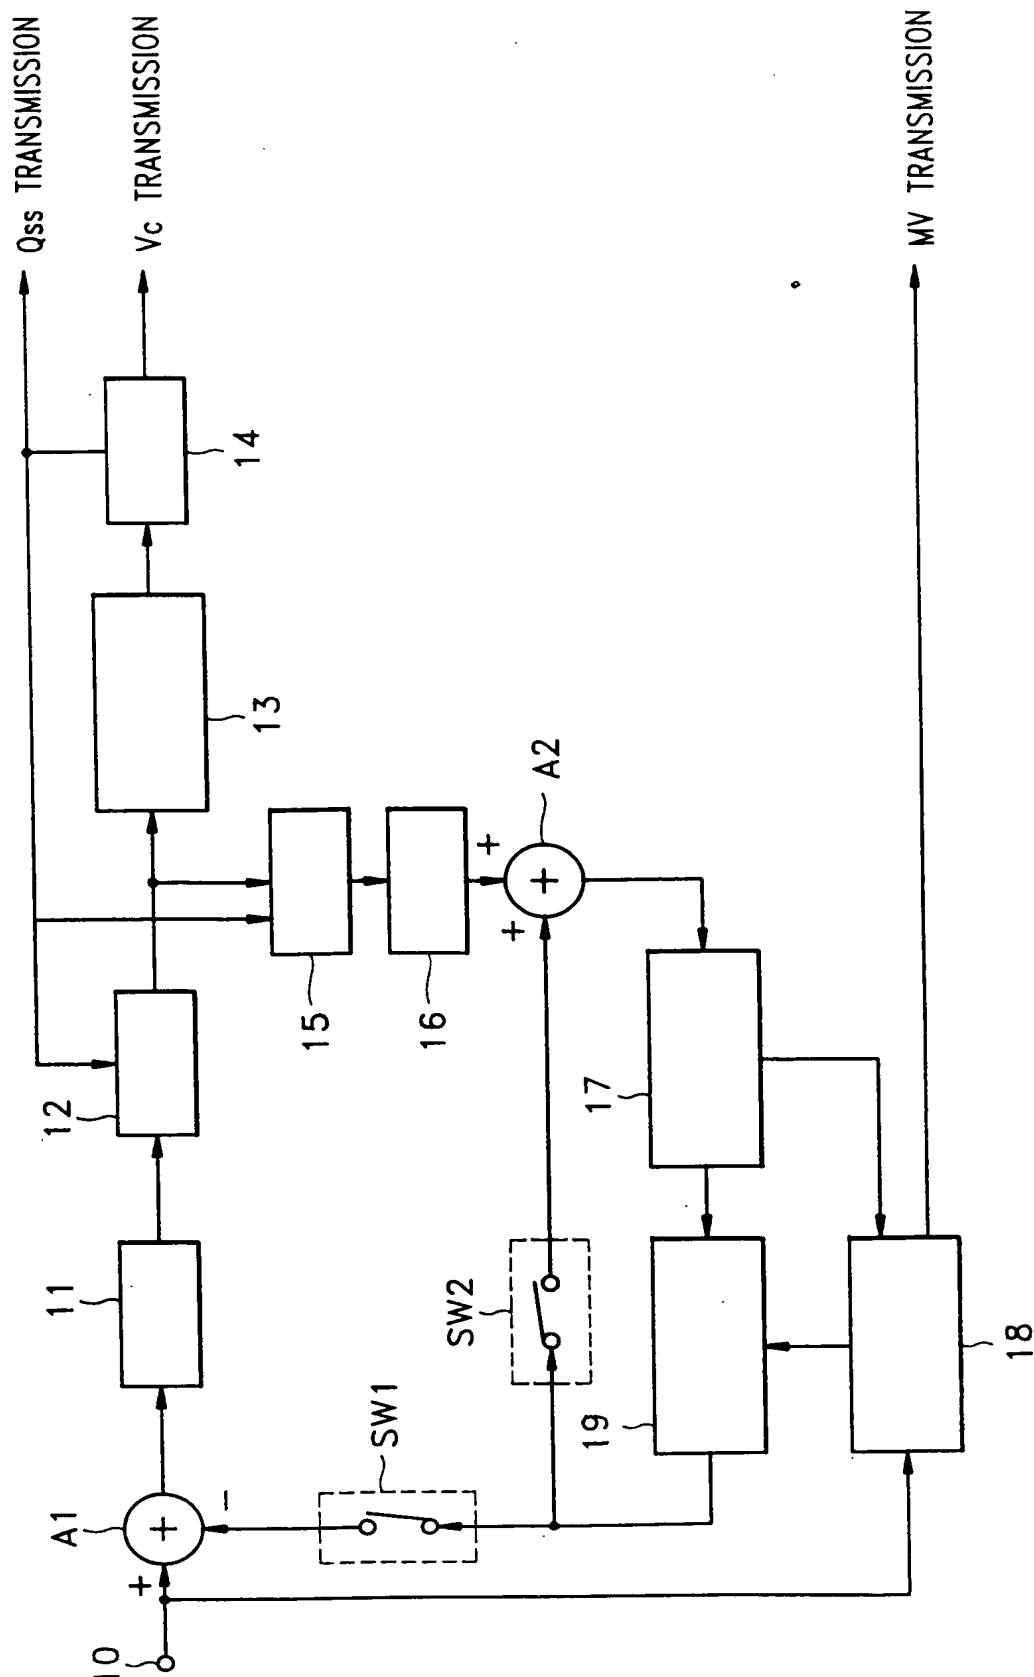

2/7

FIG. 2

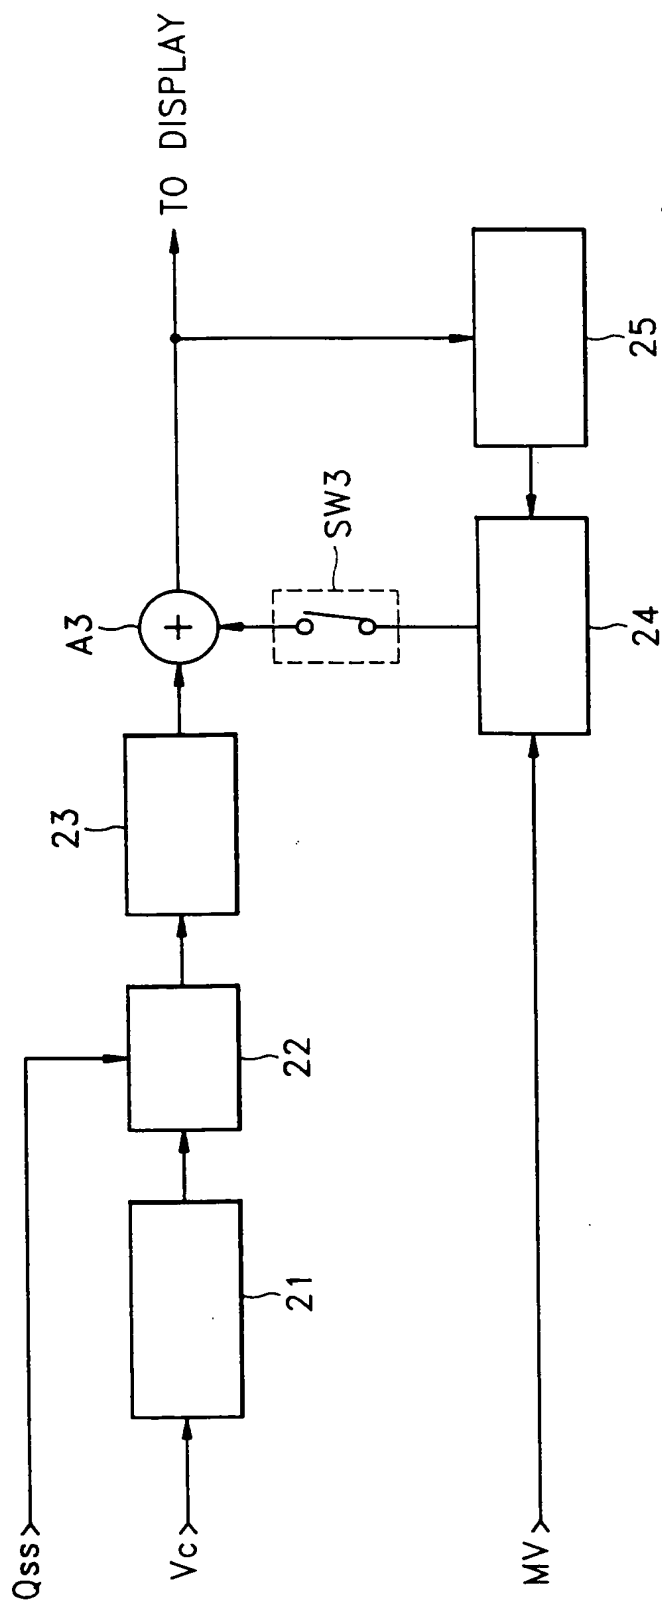


FIG. 3C

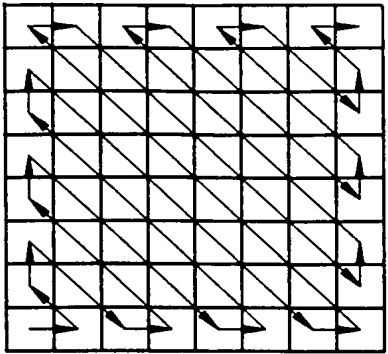


FIG. 3B


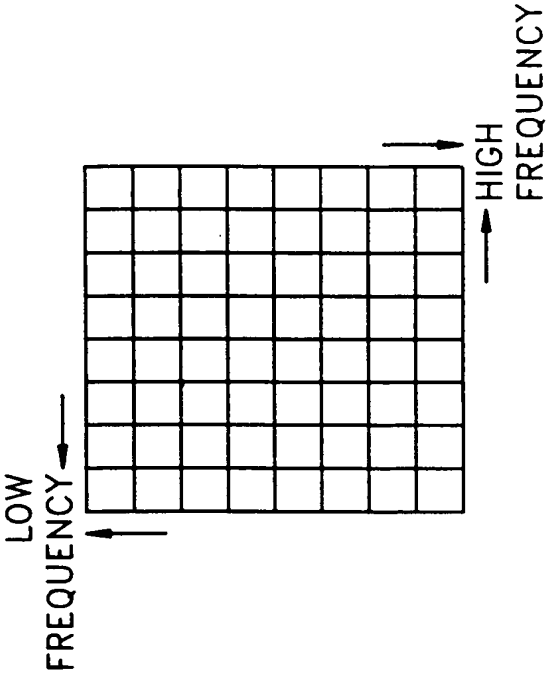


FIG. 3A

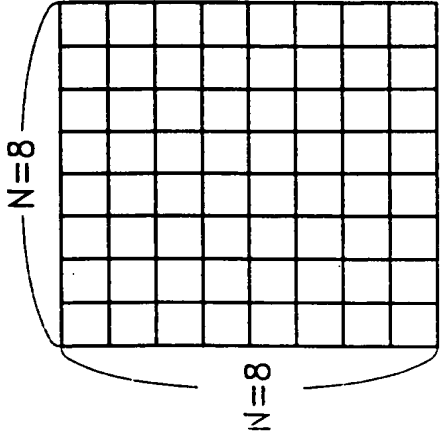

4/7

FIG. 4


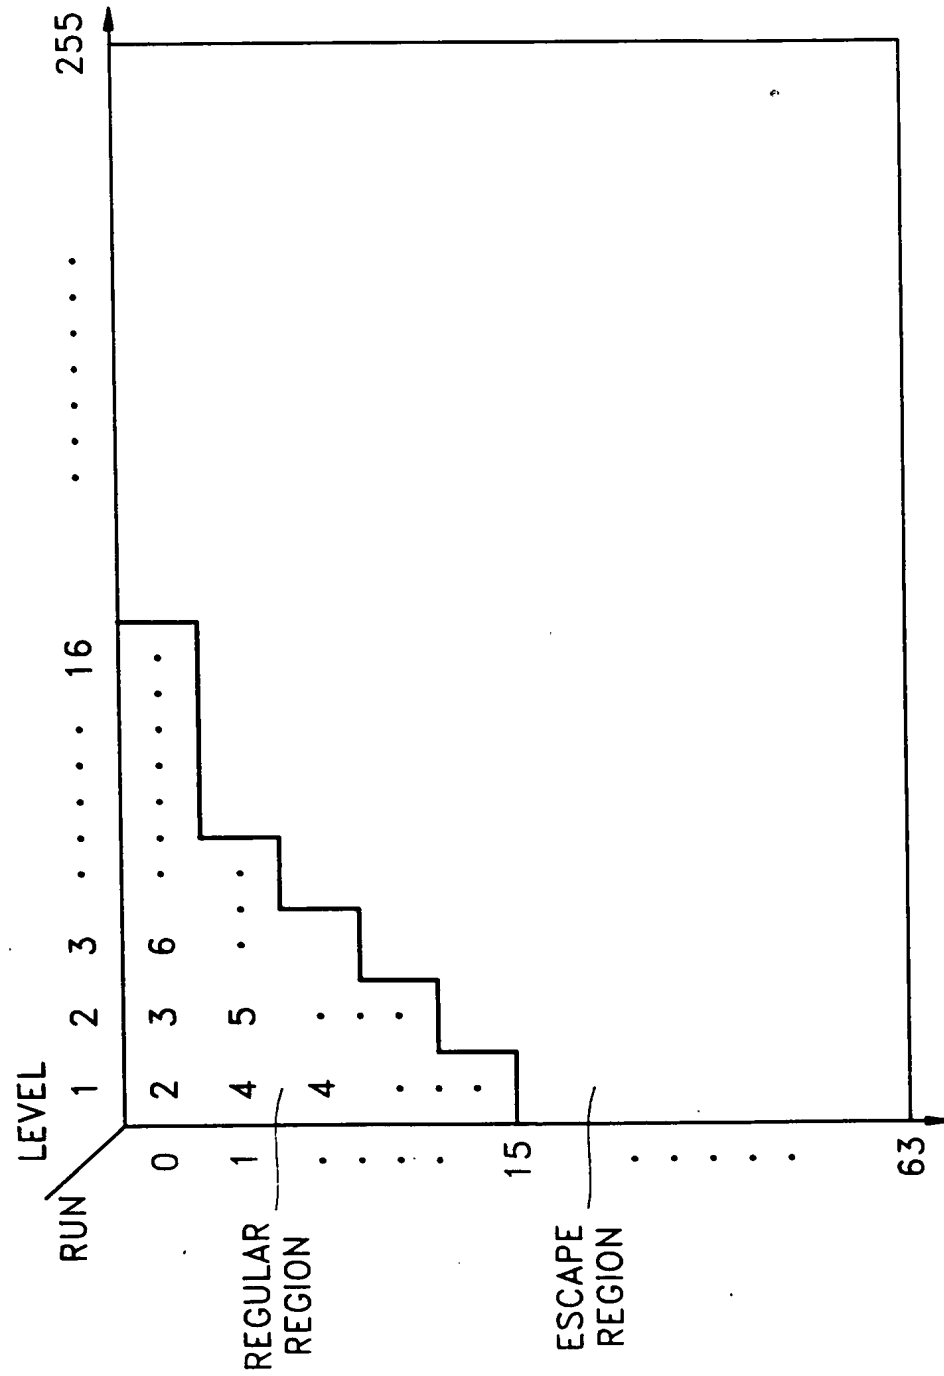


FIG. 5

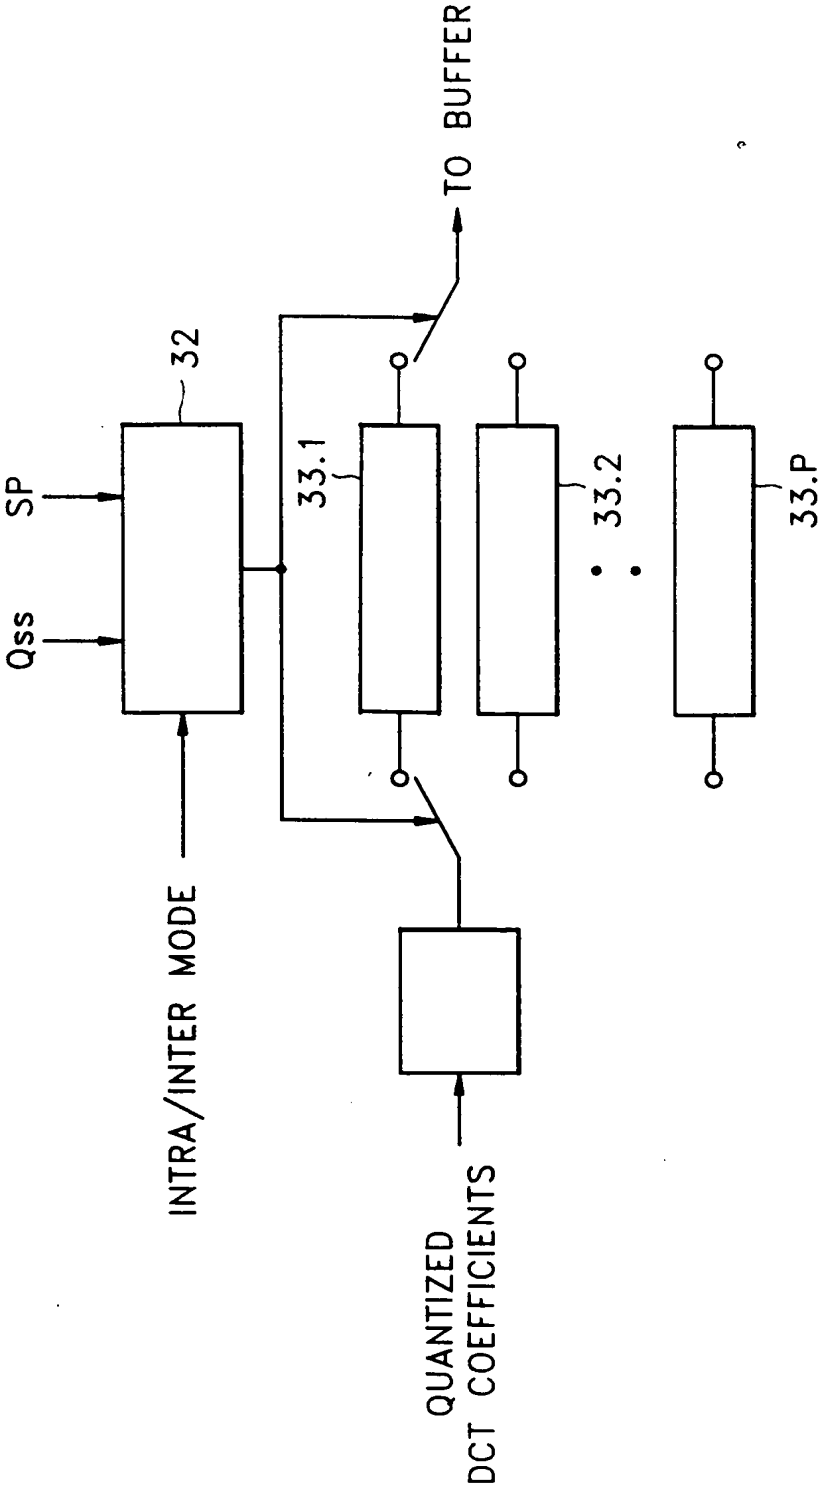

6/7

FIG. 6B

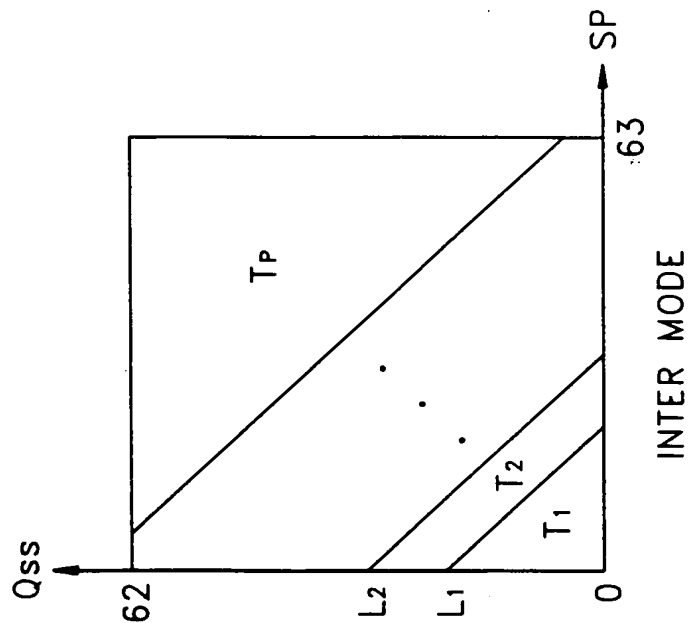


FIG. 6A



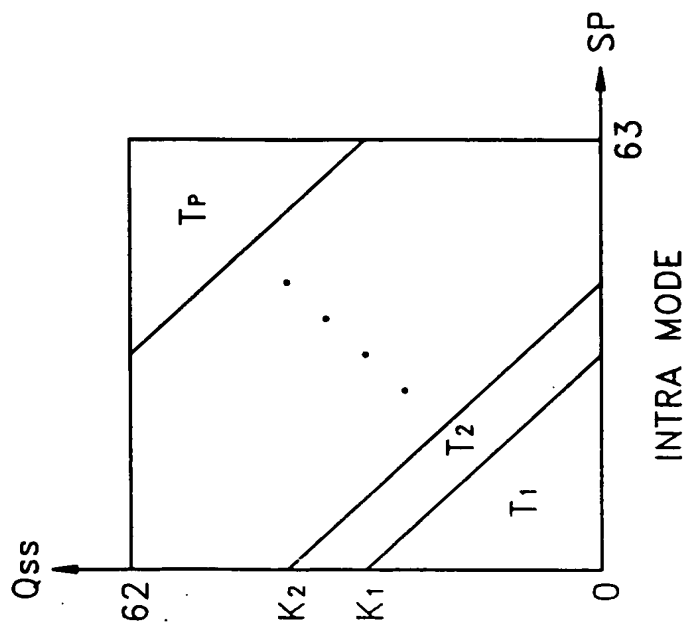


FIG. 7A

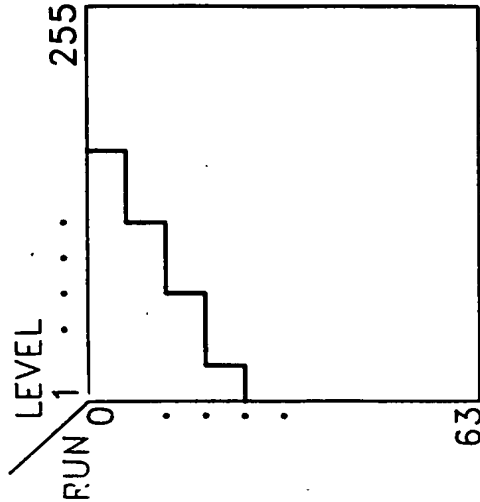


T₁

FIG. 7B

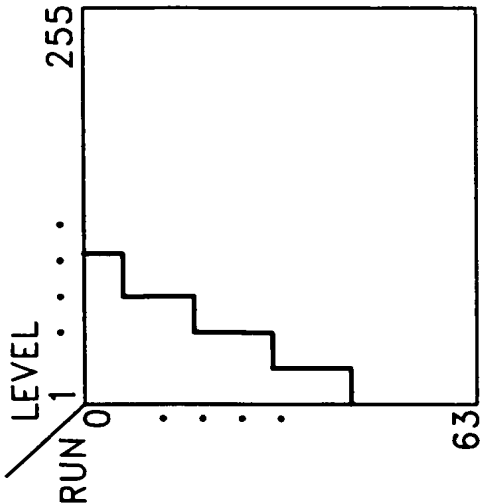

T₂

FIG. 7C

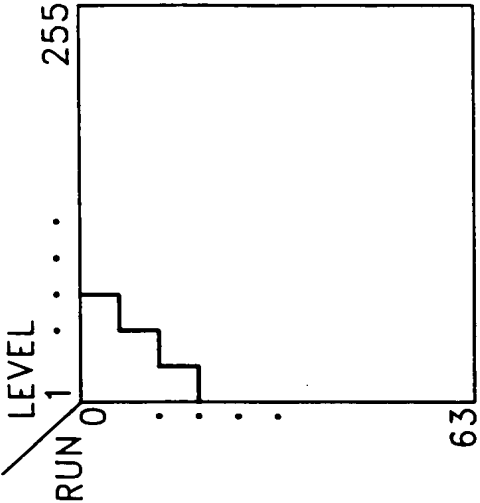

T₃

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR 94/00177

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁶: H 04 N 5/92; G 11 B 20/14; H 03 M 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁶: G 11 B 20/00; H 03 M 7/00; H 04 N 1/00, 5/00, 9/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| X | EP 05 36 630 A2 (KABUSHIKI KAISHO TOSHIBA) 14 April 1993 (14.04.93), fig.1; page 1, line 14 - page 2, line 8; fig.58; page 34, line 29 - page 36, line 11; fig.15; page 10, lines 37-46. | 1-8 |
| A | EP 05 22 853 A2 (SONY CORPORATION) 13 January 1993 (13.01.93), fig.1; column 1, line 12 - column 3, line 36. | 1,5 |
| A | REGIS Saint Girons et al.; "The Digital Sumulcast AD-HDTV Coding System", IEEE Trans.consum.electron., Vol.38, No.4, November 1992, pp 778-783; fig.3,7; chapter 2.2 - 2.4, 3 and 3.1. | 1,5 |
| A | US 52 33 348 A (POLLMANN et al.) 03 August 1993 (03.08.93), fig.4-6; column 2, lines 43-65; column 10, line 62 - column 11, line 24; column 12, lines 14-38; claim 19. | 1,5 |
| A | EP 05 05 985 A2 (KABUSHIKI KAISHA TOSHIBA) 30 September 1992 (30.09.92), fig. 26,28-33; page 3, line 51 - page 4, line 55. | 1,5 |
| --- | | |

☐

Further documents are listed in the continuation of Box C.

☒

See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 February 1995 (28.02.95)

Date of mailing of the international search report

13 March 1995 (13.03.95)

Name and mailing address of the ISA/ AT

AUSTRIAN PATENT OFFICE

Kohlmarkt 8-10

A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

Dimitrow e.h.

Telephone No. 1/53424/340

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR 94/00177

| Im Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche | Datum der Veröffentlichung Publication date Date de publication | Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets | Datum der Veröffentlichung Publication date Date de publication |
|--|--|--|--|
| EP 536630 | | EP A2 536630 | 14-04-93 |
| | | EP A3 536630 | 22-12-93 |
| | | JP A2 5091469 | 09-04-93 |
| | | JP A2 5137111 | 01-06-93 |
| | | JP A2 5137110 | 01-06-93 |
| | | JP A2 5176298 | 13-07-93 |
| | | JP A2 5268563 | 15-10-93 |
| | | JP A2 5268567 | 15-10-93 |
| | | JP A2 5268568 | 15-10-93 |
| | | JP A2 5308610 | 19-11-93 |
| | | JP A2 6038171 | 10-02-94 |
| EP 522853 | | EP A2 522853 | 13-01-93 |
| | | EP A3 522853 | 19-05-93 |
| | | JP A2 5161115 | 25-06-93 |
| | | NL A 9300059 | 18-10-93 |
| US A 5233348 | 03-08-93 | AU A1 34033/93 | 30-09-93 |
| | | AU B2 654929 | 24-11-94 |
| | | CA AA 2091815 | 27-09-93 |
| | | EP A2 562419 | 29-09-93 |
| | | EP A3 562419 | 22-06-94 |
| | | JP A2 6104768 | 15-04-94 |
| EP 505985 | | EP A2 505985 | 30-09-92 |
| | | EP A3 505985 | 06-10-93 |
| | | JP A2 4298802 | 22-10-92 |